

# FERRI®

[www.ferri-america.com](http://www.ferri-america.com)



## MT

### Mowers

• Grass • Twigs • Tractors from 30 to 70 HP

<b>MT 140</b>		30 to 45 HP		4'7"	<b>MT 180</b>		45 to 60 HP		5'11"
<b>MT 160</b>		35 to 50 HP		5'3"	<b>MT 200</b>		50 to 70 HP		6'7"



# Mowers

• Grass • Twigs • Tractors from 30 to 70 HP



Version with central and offset linkage



Version with hydraulic sliding linkage



Adjustable rear roller with scraper




Rotor internal sealed bearings



Adjustable rear shield



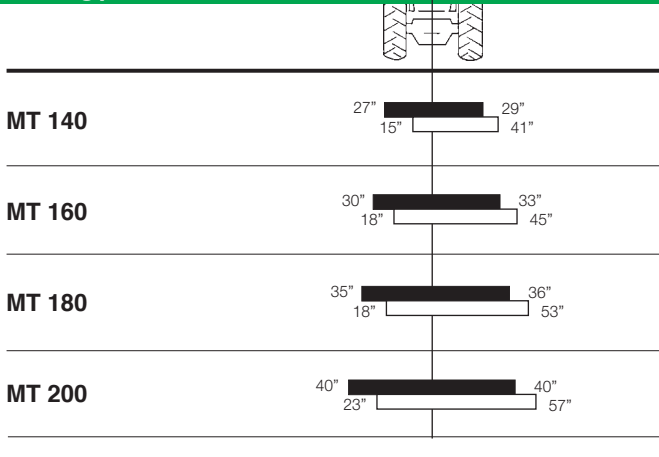

## Working positions



## Technical specifications

Model		MT 140	MT 160	MT 180	MT 200
Cutting width	ft	4'7"	5'3"	5'11"	6'7"
Three point linkage	Cat.	0 - I	0 - I	I - II	I - II
Weight	lbs	705	794	926	1014
Required tractor engine power	HP	30/45	35/50	45/60	50/70

Flails	MOD.	MT 140	MT 160	MT 180	MT 200
 "Y" flails max cut 1 1/4"	No.	32	40	48	48
 Hammer blades max cut 1 3/4"	No.	16	20	24	24



FERRI srl Via C. Govoni, 30 - 44034 Tamara (FE) Italy  
 Tel. 011-39-0532.866866 - Fax 011-39-0532.866851 - www.ferrisrl.it - info@ferrisrl.it

## Customer Service / FERRI:

John Fisher  
 PO Box 127  
 Lake Oswego, OR 97034 USA  
 Phone 503.675.1070  
 Fax 503.699.4170  
 ferri.america@comcast.net  
 www.ferri-america.com

All data subject to change.

MT219A REV.04 09/08 2000

Comcast 6348